




SECTIONAL DOORS

MODELS 3500 / 3550

DOOR WIDTHS TO 24' 2"
CLEARVIEW ALUMINUM STRUT SYSTEM

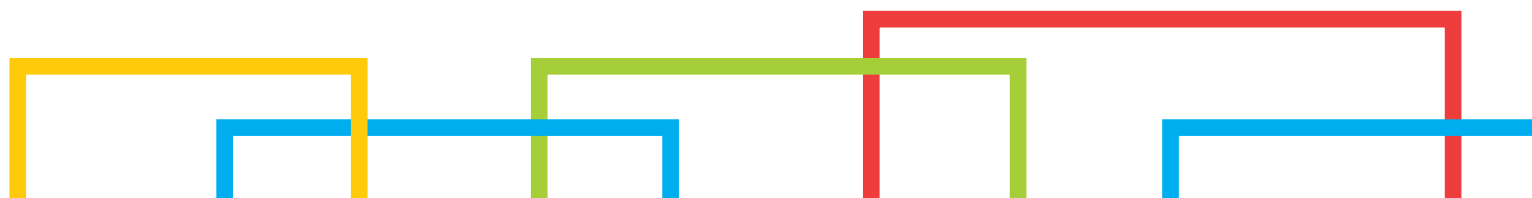



Model 3500 with custom stile arrangement.

Amarr's aluminum doors are constructed of 2" thick extruded aluminum rails and stiles and can be fitted with solid aluminum panels or a variety of full-view glass options. Perfect for automotive showrooms and repair centers, service stations, car washes, fire houses, restaurants, and sports complexes; our aluminum doors create a clean style for any facility. These doors can be mounted stationary or operative as a stylish alternative for al fresco situations.

The ClearView Aluminum Strut System provides added strength and durability to larger Model 3550 door sizes up to 24' 2", without restricting the viewing area.



Model 3500 with Aluminum top and bottom panels.

ALUMINUM PANELS

Actual color may vary from sample shown.
Custom Powder Coat options available for Model 3550 only.



CLEAR
ANODIZED



ANODIZED
DARK BRONZE*



ANODIZED
BLACK*



WHITE
POWDER COAT*

* Model 3550 only.

WARRANTIES


- 5-year Limited Warranty on finish
- 1-year Limited Warranty on materials and workmanship
- See your dealer or visit amarr.com for complete warranty details

Construction

Model 3500

Medium-duty Aluminum Door


MODEL 3500

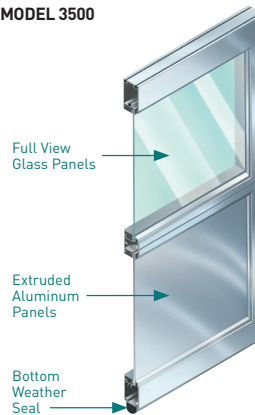

Model 3550

Heavy-duty, Aluminum Door

MODEL 3550

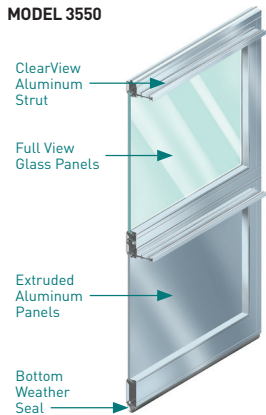

EXTRUDED ALUMINUM

Aluminum or Full View Glass Panels Wind load approved

Track: All Amarr doors are available with both 2" or 3" track in Standard Lift, High Lift, Vertical Lift, Low Headroom, and Follow the Roof Pitch. Custom track configurations are also available. Stainless steel track and hardware available for car wash applications. For drawings and more information, please visit our website at www.amarr.com.

Hardware: Amarr hardware includes minimum 14-gauge galvanized steel hinges and 13-gauge galvanized steel track brackets. All rollers have minimum 10-ball bearings.

Springs: Torsion springs are oil tempered, helical wound and custom computed for each door for a minimum 10,000 cycle life. Optional springs are available up to 100,000 cycle life.

GLAZING OPTIONS

	MODEL 3500	MODEL 3550
DSB GLASS		
Single or Insulated	Single Only	•
TEMPERED GLASS		
Single or Insulated	Single Only	•
OBSOLETE GLASS		
Single or Insulated	Single Only	•
THERMAPRO LOW-E GLASS	Single Only	•
POLYCARBONATE GLAZED	n/a	•
ACRYLIC GLAZED	•	•
ALUMINUM PANEL	•	•
CUSTOM OPTIONS	•	•



165 Carriage Court
Winston-Salem, NC 27105
800.503.DOOR
www.amarr.com

FOR PRODUCT
BINDER:
1.866.366.4814
FOR TECHNICAL
QUESTIONS:
1.866.366.4814



YOUR LOCAL AMARR DEALER:

Entrematic reserves the right to change specifications and designs without notice and without incurring obligations.

Sectional door products from Entrematic may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents.

Amarr as word or logo is a registered trademark belonging to Entrematic Group AB or other companies controlled by the same organization. All rights reserved.

©Entrematic Group AB 2014. All rights reserved.
Printed in USA Form #6221114/5M/GVS